

Carbon Pleat Filters

SPECIALTY FILTRATION

Overview

Carbon Pleat filters are specifically designed to remove unpleasant odors and gaseous pollutants entering a building's HVAC system, neutralizing target molecular or gas phase contaminants prior to air distribution.

Construction

Made of 100% CTC 60 highly activated mesh carbon surrounded by a heavy duty beverage board frame for commercial & industrial applications.


Performance Data

Rating	MERV 7
Carbon Layer	215 GSM CTC 60 20x50 High Activity
Initial Resistance	0.33" w.c. @1968 CFM - 24x24x2
Final Resistance	1.0 in w.c.
Max Temperature	150 °F
Sealant	Moisture Resistant Adhesive
UL 900 Classified	Yes

Standard Sizes


1"	2"	4"
12x24x1	12x24x2	12x24x4
16x20x1	16x20x2	16x20x4
16x25x1	16x25x2	16x25x4
18x24x1	18x24x2	18x24x4
20x20x1	20x20x2	20x20x4
20x24x1	20x24x2	20x24x4
20x25x1	20x25x2	20x25x4
24x24x1	24x24x2	24x24x4

*Special sizes available

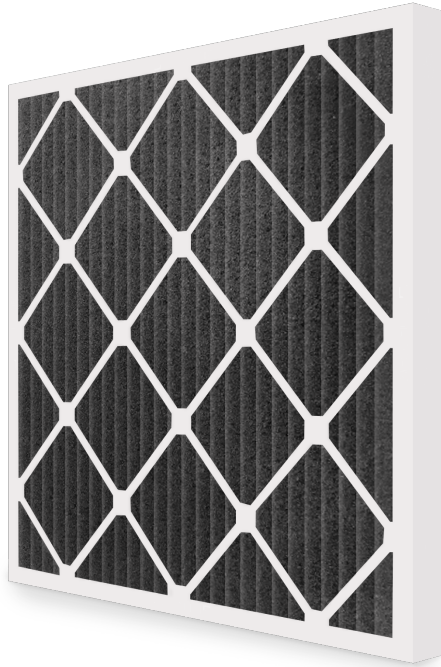

Removes

- Acetic Acid
- Asphalt
- Cooking Odors
- Disinfectants
- Food Aromas
- Hospital Odors
- Perspiration
- Animal Odors
- Sewer Odors
- Waste Products
- Organic Chemicals
- Ozone

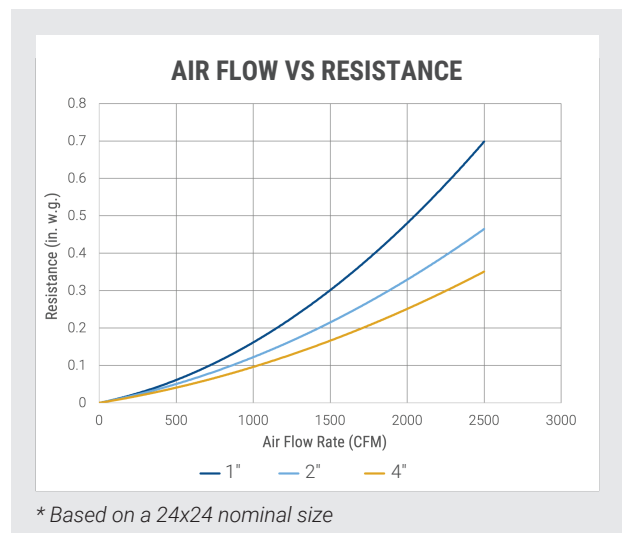

Contact Us

112 S. Respass St. Washington, NC 27889
 www.pamlico-air.com
 info@pamlico-air.com
 252.623.4010